



BUILDING MATERIALS

www.luzzobm.com



All images used
in this catalog
are property of
Luzzo Bulding Materials LLC

Florida, Miami,
EE.UU.
7540 NW 5th St suit 2, Plantation,
FL 33317, United Station.

www.luzzobm.com
@Luzzobm



With heart
and luxury.



¿Who are we?

We are an experienced team that believes in transformation and innovation. We believe in the importance of the changes, but even more, we believe in the fact that everybody can create sustainable and comfy places.

We don't renovate spaces, we help you to transform them in a modern, chic, and eco-friendly way. We experiment with new concepts and ideas to offer the touch of innovation that will turn your home, office, or whatever place you want into the best environment.

With Wood Plastic Composite panels (WPC) of the highest quality. Practical, eco-friendly, and less destructive with the forest.



¿What is


WPC?



Awareness of the use of natural resources and the sustainability of the ecosystem has led to the production of materials that are more respectful of the planet and less destructive to the forest mass.

The WPC panel (Wood Plastic Composite) allows all this through a production technique that requires much less wood, using recycled materials, obtaining equally satisfactory and even more creative results.

The WPC are panels created from composites of wood and synthetic particles (plastic), which makes them an environmentally friendly option and also an inalterable material, thanks to its composition it does not rot or alter in the presence of microorganisms, it is resistant to environmental changes and does not suffer wear and tear due to the weather. In addition to being fireproof, it requires no maintenance, is easy to install and provides a natural finish to spaces.

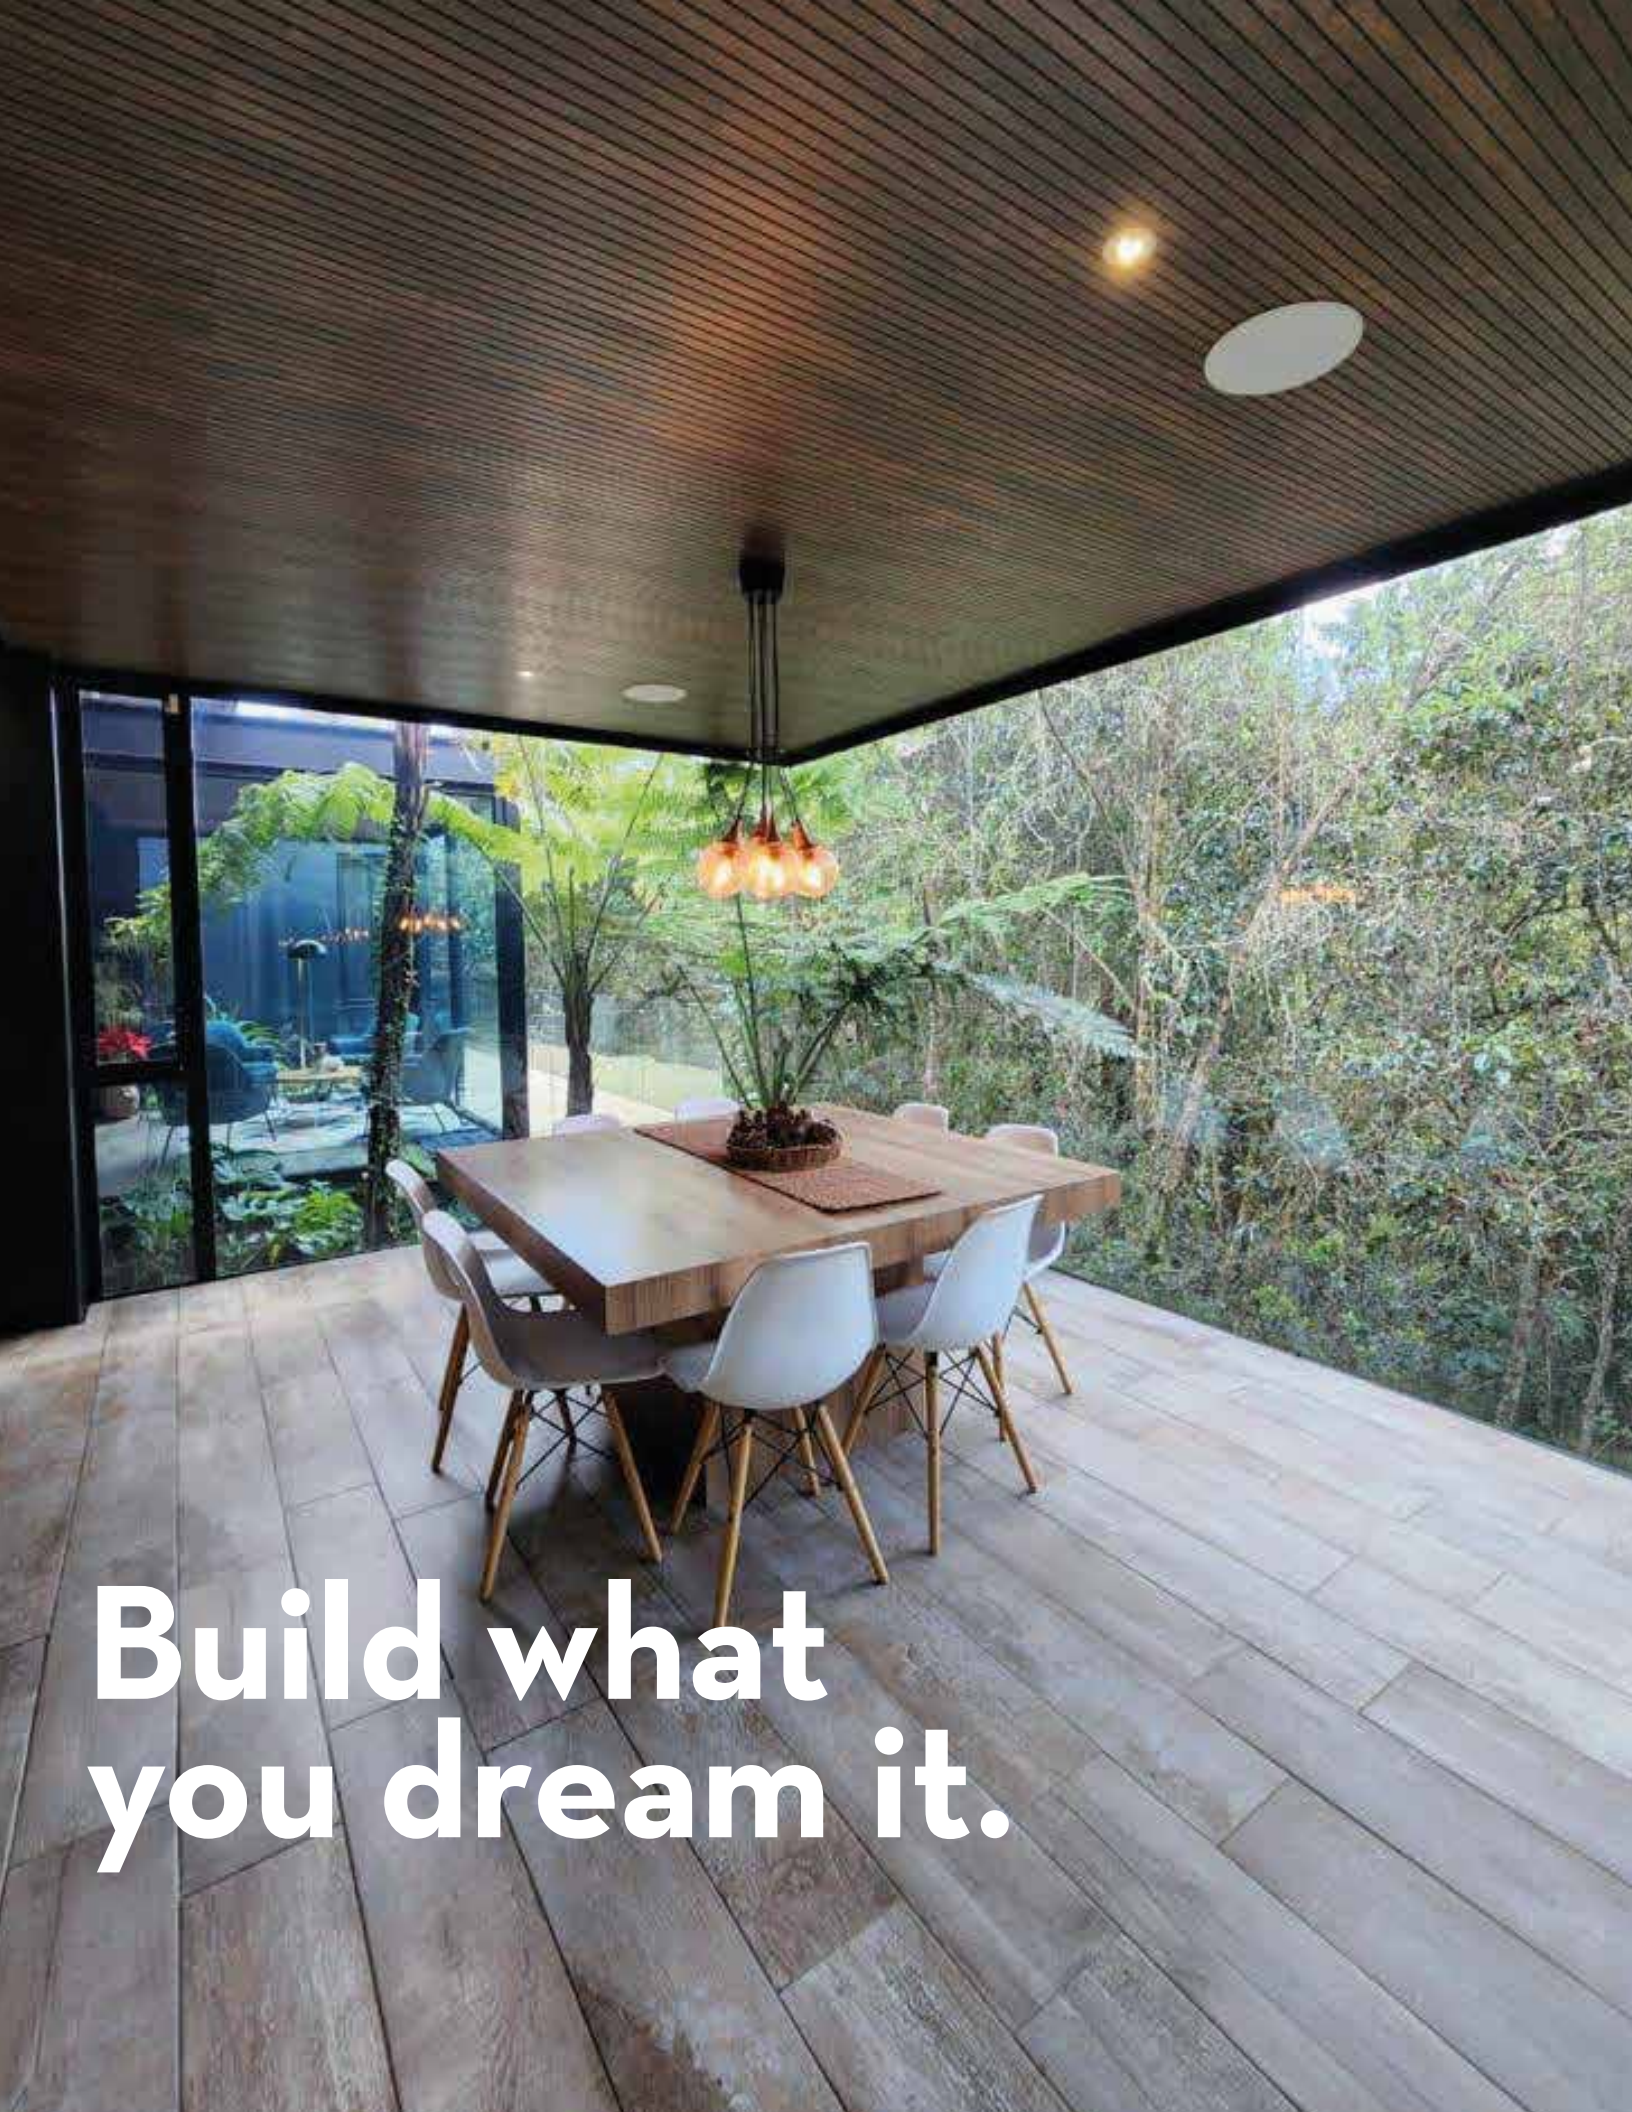


**Build what
you dream it.**

Properties

- 01. Eco-friendly.
- 02. Easy/ fast installation.
- 03. Moisture resistant.
- 04. Corrosion resistant.
- 05. Resists harsh environments.
- 06. Pest resistant.
- 07. Flame retardant.
- 08. Can be painted.
- 09. Low maintenance.



LISCIO

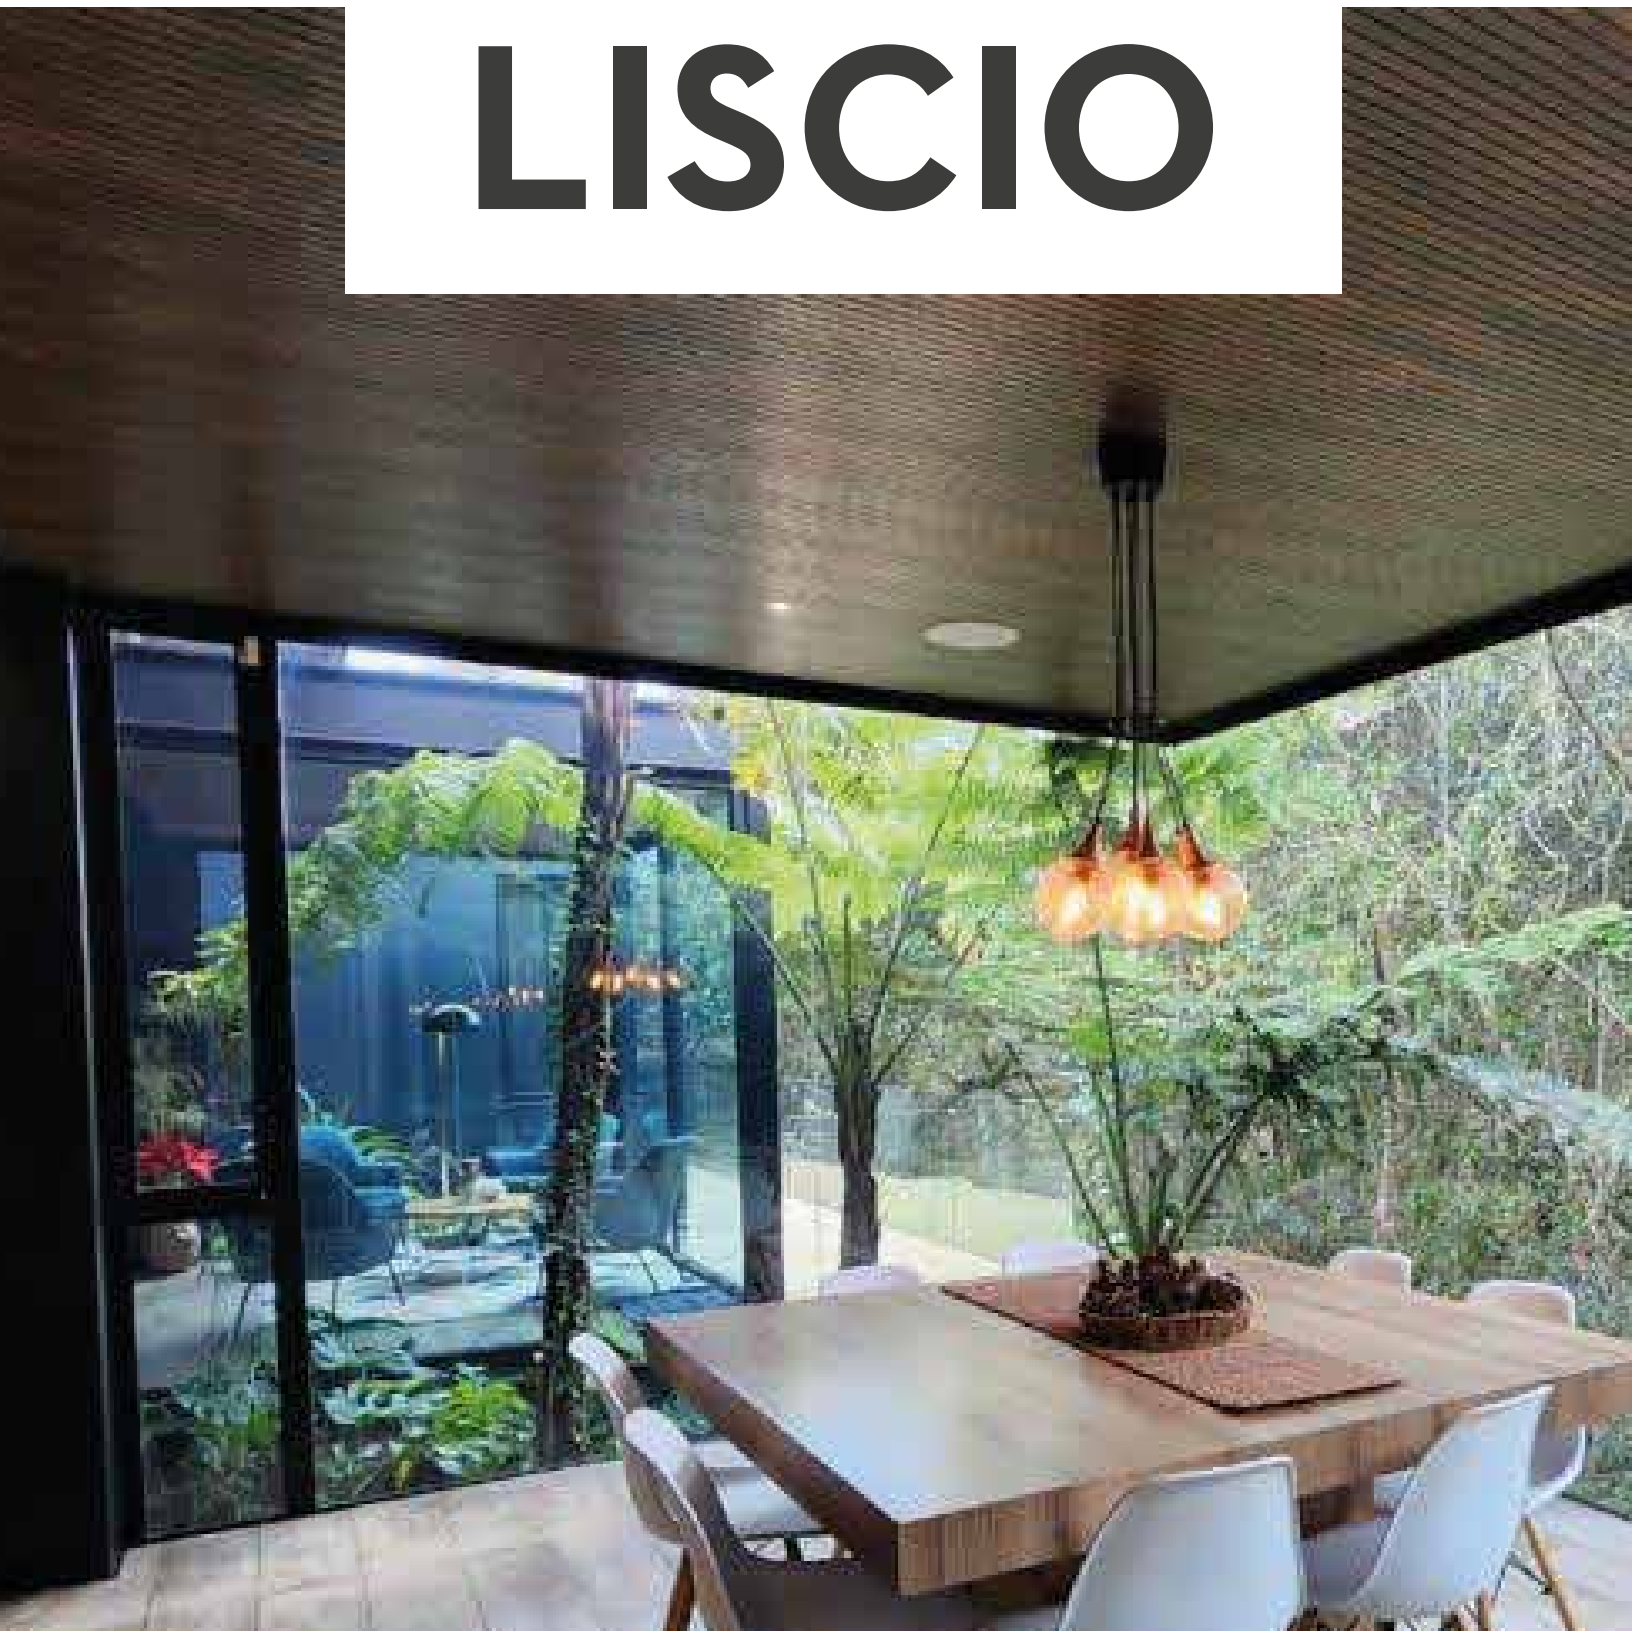



With the LISCIO panels you can make your spaces your favorite places to rest and enjoy every moment. As an interior panel it will help your home look warm, relaxed and sophisticated.

Interior panel

Dimensions

Wide/9-7/8"

Lenght/9'-6"

Depth/3/8"



Hue **Liscio**





Reference Hue Liscio 9-7/8" x 9'-6" x 3/8"

Interior panel

Dimensions

Wide/9-7/8"

Lenght/9'-6"

Depth/3/8"



Ashen **Liscio**





Reference Ashen Liscio 9-7/8" x 9'-6" x 3/8"

Interior panel

Dimensions

Wide/9'-7/8"

Lenght/9'-6"

Depth/3/8"



Ebony **Liscio**





Reference Ebony Liscio 9-7/8" x 9'-6" x 3/8"

Interior panel

Dimensions

Wide/9'-7/8"


Lenght/9'-6"

Depth/3/8"



Teka **Liscio**




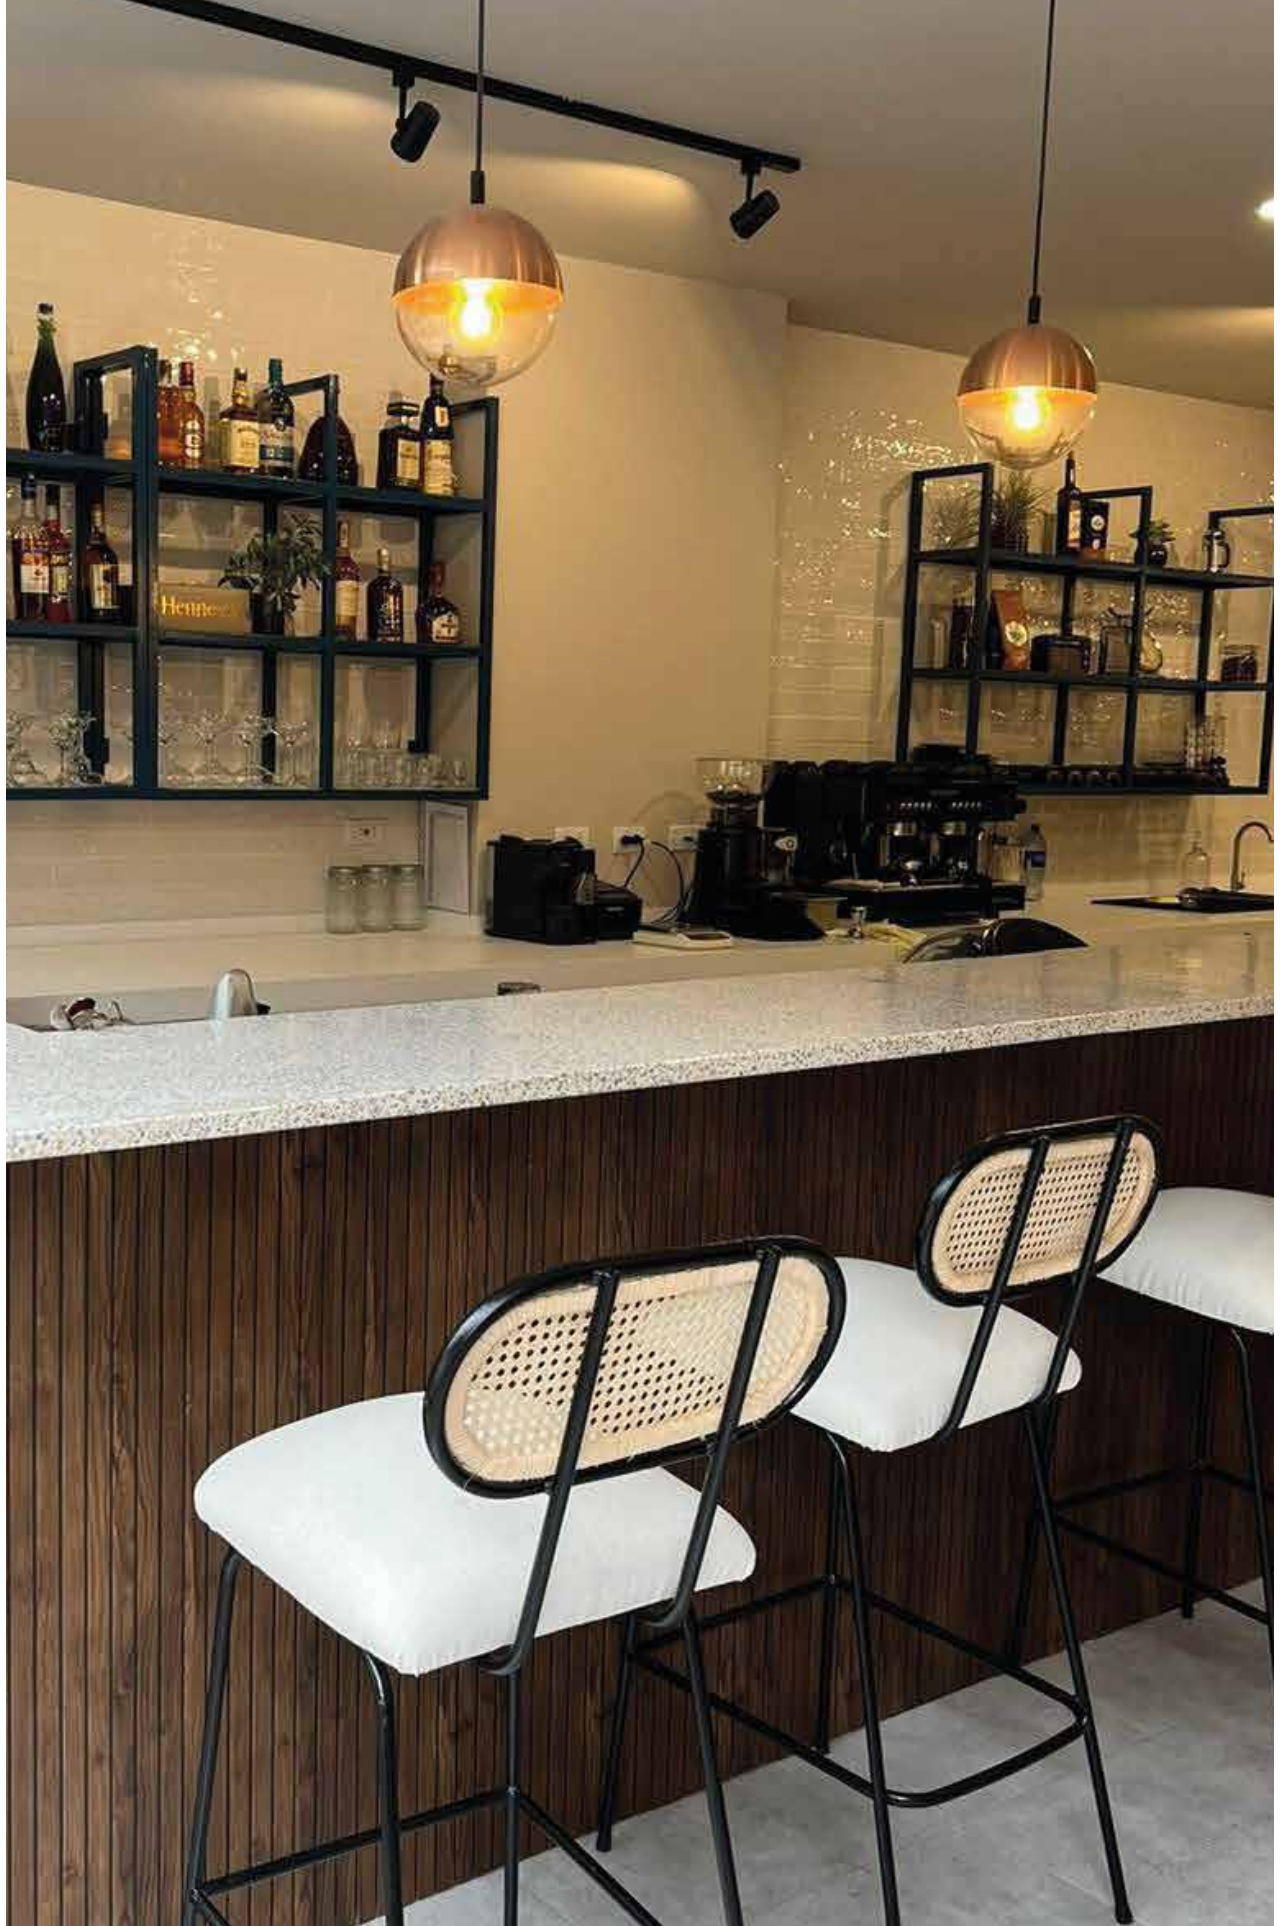

Reference Ebony Liscio 9-7/8" x 9'-6" x 3/8"

Liscio

dimensions


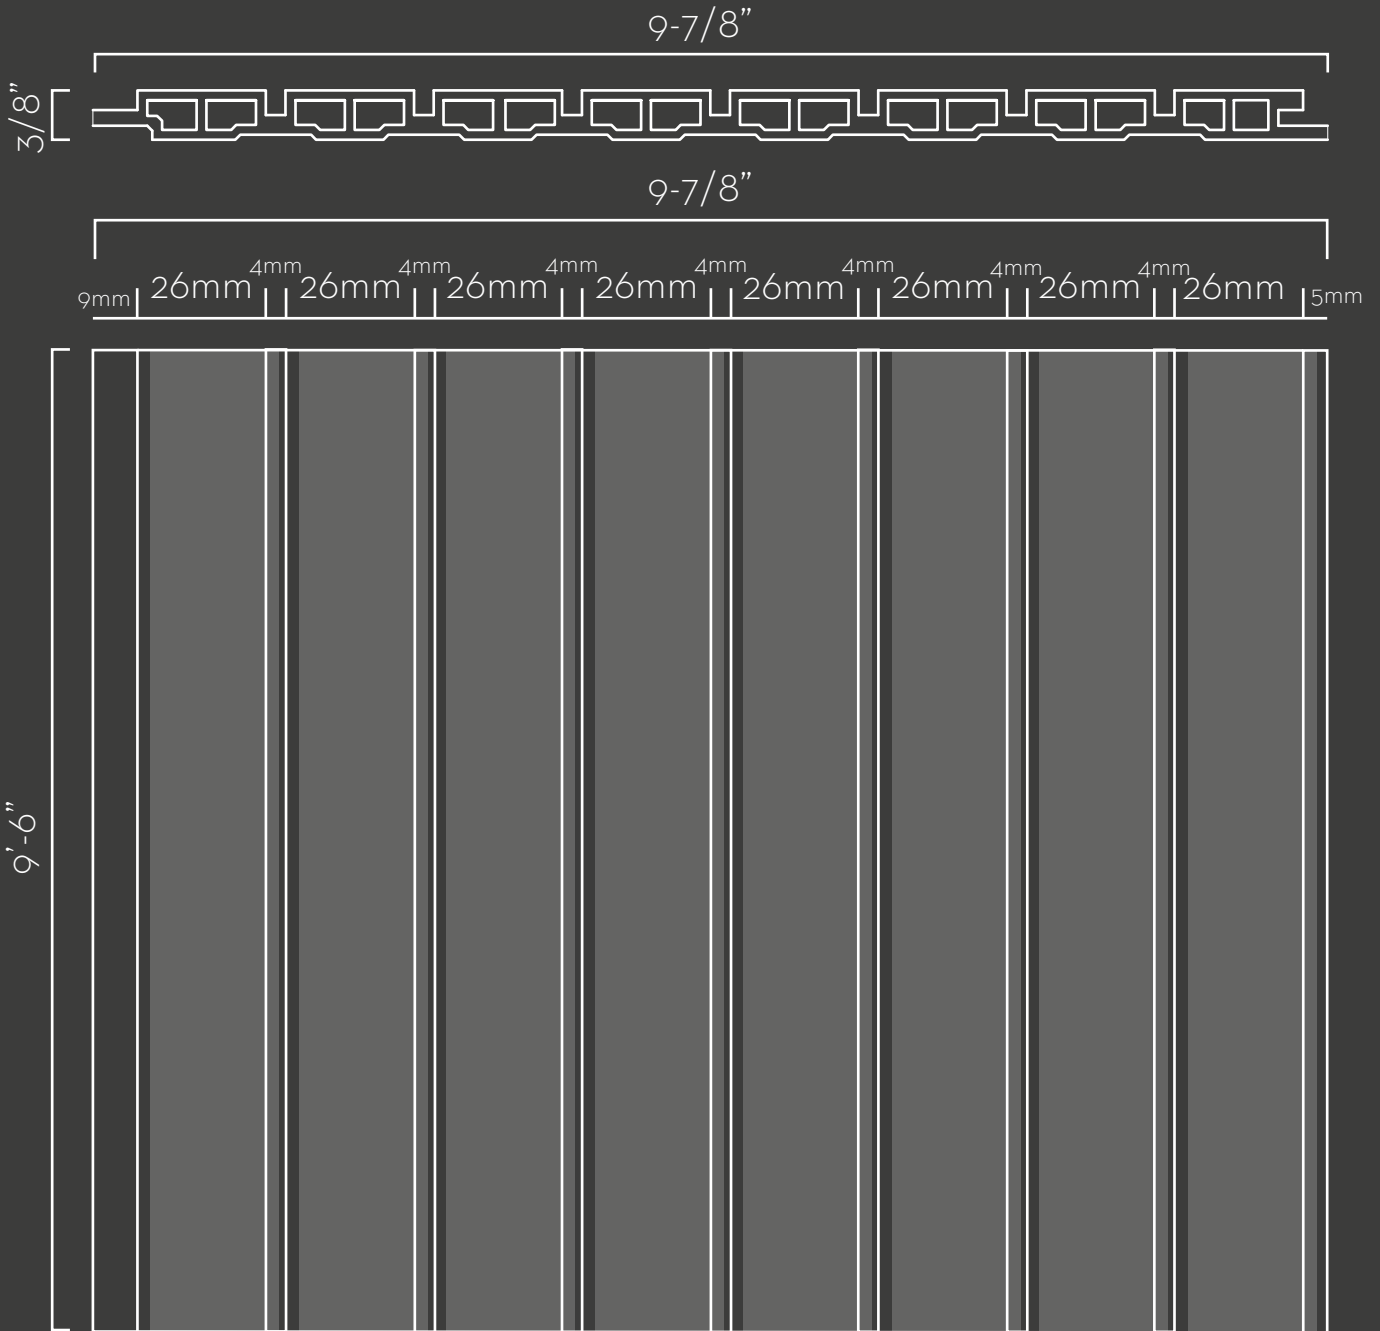


Technical data

LISCIO



Wall panel 3D	
Wide:	9-7/8"
Lenght:	9'-6"
Depth:	3/8"
Finishi:	Corrugated
Weigth:	6 Lb/unit
Composition:	Encapsulated WPC

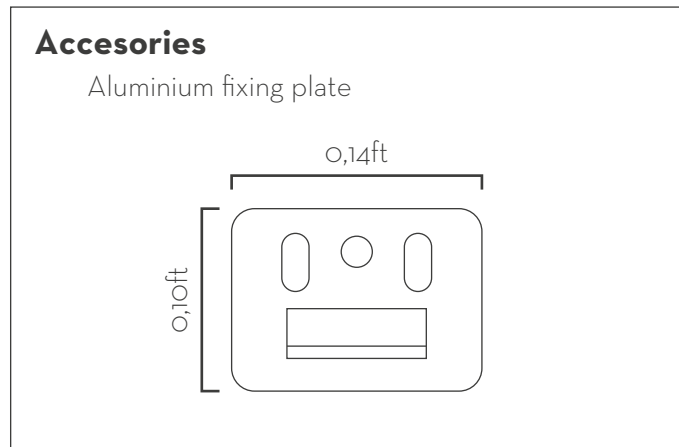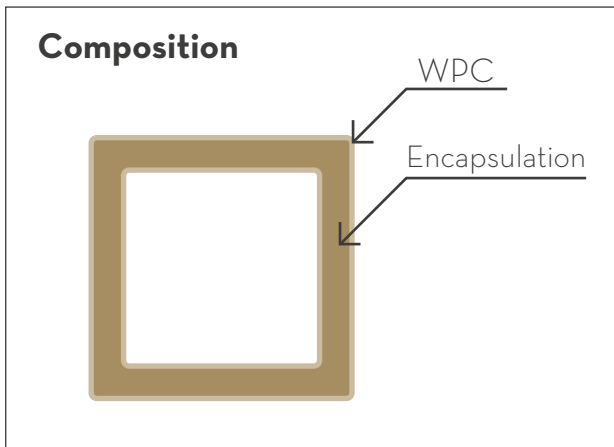

Applications on interior spaces:

Interiorism.
Ceilings.
Coatings.

Technical data

LISCIO

COMPOSITION	
Ingredient	Percent/%
PVC	50
Wood bamboo powder	15
Calicium powder	25
Additives	10









Weight by piece(LB)	6
Weight by box(LB)	95
Box dimension(L*W*H)	295*26*17cm

Installation guide



Verify that the visible face of the product is the one with the finish, if the surface on which the coating is to be installed is not flat, or suffers from humidity or exterior contact, it must have a perpendicular support structure, parallels and channels (walls) or perimeter angles and omegas (false ceilings) at a maximum distance of 2ft. Supports are also required on suspended structures.

Tools

 <p>Luzzo's panels</p>	 <p>Corner</p>	 <p>Anchoring</p>	 <p>Drill</p>	
 <p>Measuring tape</p>	 <p>Screws</p>	 <p>Chop saw</p>	 <p>Leveler</p>	 <p>Caulking gun</p>


Step by step

1




Place the first wall panel on the wall with the tongue side flush with the edge of the wall.

2

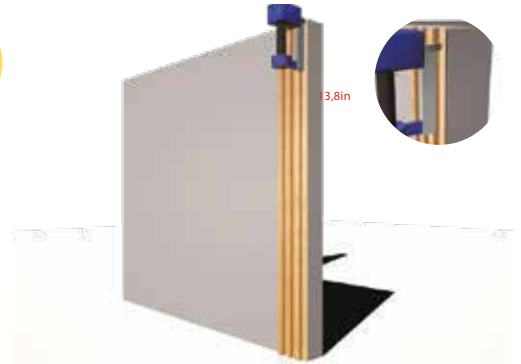


Use drill to attach the panel to the wall with the screws seated in the tongue.

3

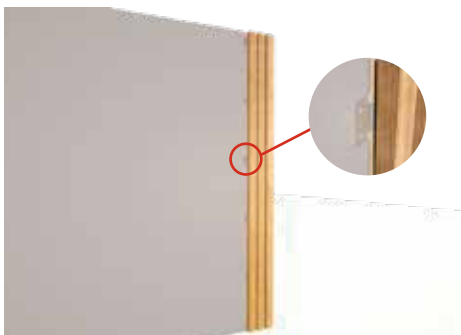

On the other side, attach the anchors to the panel, then attach to the wall with the drill.

4

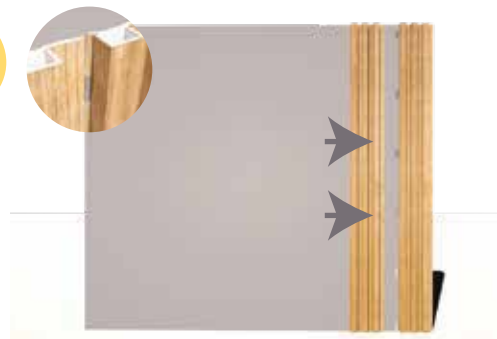

Snap the second panel into place, the tongue of the second panel should fit into the groove of the first panel. Finish the rest in the same way.

5



Use the glue to glue the corner piece.

6



Finished installation.

Maintenance and usage recommendations


for Luzzo's panels



Clean the panel with a damp or dry cloth.




The use of aggressive cleaning products is not recommended, as they may discolor the panels.

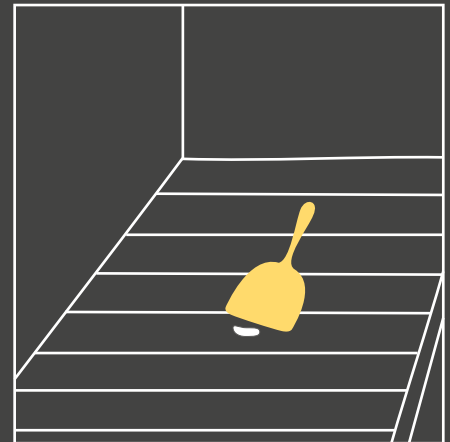


Any adhered product must be removed with the plastic spatula.



Do not strike the material during unloading and hold it firmly during transport..

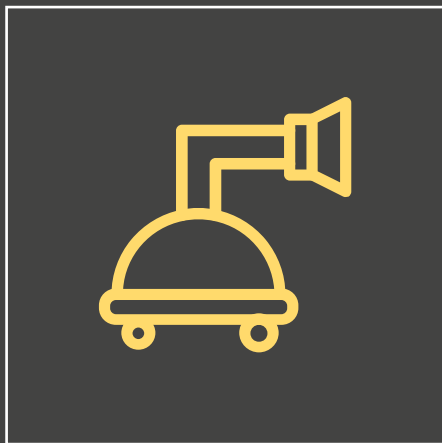

Can be pressure washed, with maximum pressure recommendation 1100 PSI. Always take the necessary safety measures and prevent damage to the material.

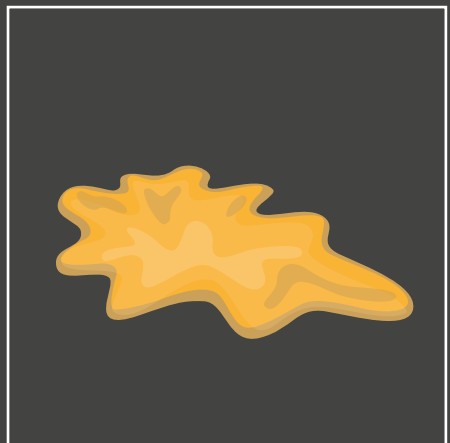

If contamination appears, clean it immediately by removing any spilled substance; if it is abrasive, dry it and do not rub it, you can wet it with warm water and dry it with a soft cloth.

Warranty

for Luzzo's panels

Our product has the following warrantees:

WPC Panels:

Years 5 warranty.

This guarantee covers the longevity of the product against structure deformations in it and/or composition that could significantly modify its appearance or its functionality. The guarantee will exclusively cover the replacement of our material and the cost of replancing them on site.

The warranty only covers the value of the product and doesn't cover labor or other costs for remove of install products.

For all purposes, the warranty terms will be considered from the date of the invoice.

Transport:

The responsibility in the transport of the merchandise will be considered on behalf of the buyer or client, unless expressly indicated in the invoice that this service has been contracted.

If it necessary to activate the transport insurance, the guarantee will be understood to have expired with the acceptance of the buyer, either through his signature or after 3 days from receipt. This as long as, at the time of receipt of the product, its acceptance with reservations is stated in writing in the transporter document, because it considers the existence of some hidden damage or that could not be verified within this period for the corresponding claim of transport insurance.

Warranty annulment:

- All guarantees will be no longer be valid due to events not attributable to the manufacturer, such as acts of nature (earthquakes and floods) or accidents such as fires or impacts of objects on the product that could damage it, improper use of the product for purposes other than those considered by the manufacturer.
- The damage that could be caused by cleaning with abrasive chemical agents or caused scratches is not covered by the guarantee, considering these, those that are mentioned after the reception of the panel or the signature of conformity of delivery and installation on site, as appropriate to the contracted service.
- It is considered null and void, when the installation is the responsibility of the buyer, serious defects are detected in it that could partially or totally null the product guarantees due to direct affectation.

**If you would like to request a warranty on our panels,
please contact your consultant to send you the form.**

LUZZO

7540 NW 5th St suit 2
Plantation, FL 33317, Estados Unidos
info@luzzobm.com
Phone number: (954) 800-4906
www.luzzobm.com