

LUZO

BUILDING MATERIALS

Interior grooves panel
installation guide

Main tools



Luzzo Panel



Cornerback



Anchorage



Drill



Measuring tape



Screw



Cutting saw



Leveler




Caulking gun

INSTALLATION




Verify that the visible face of the product is the one with the finish, if the surface on which you are going to install the coating is not flat or is affected by humidity or contact to the outside, must have a perpendicular support structure, studs and channels (walls) or perimeter angles and omegas (false ceilings) at a maximum distance of 60 cm. Supports also required in suspended structures.

1

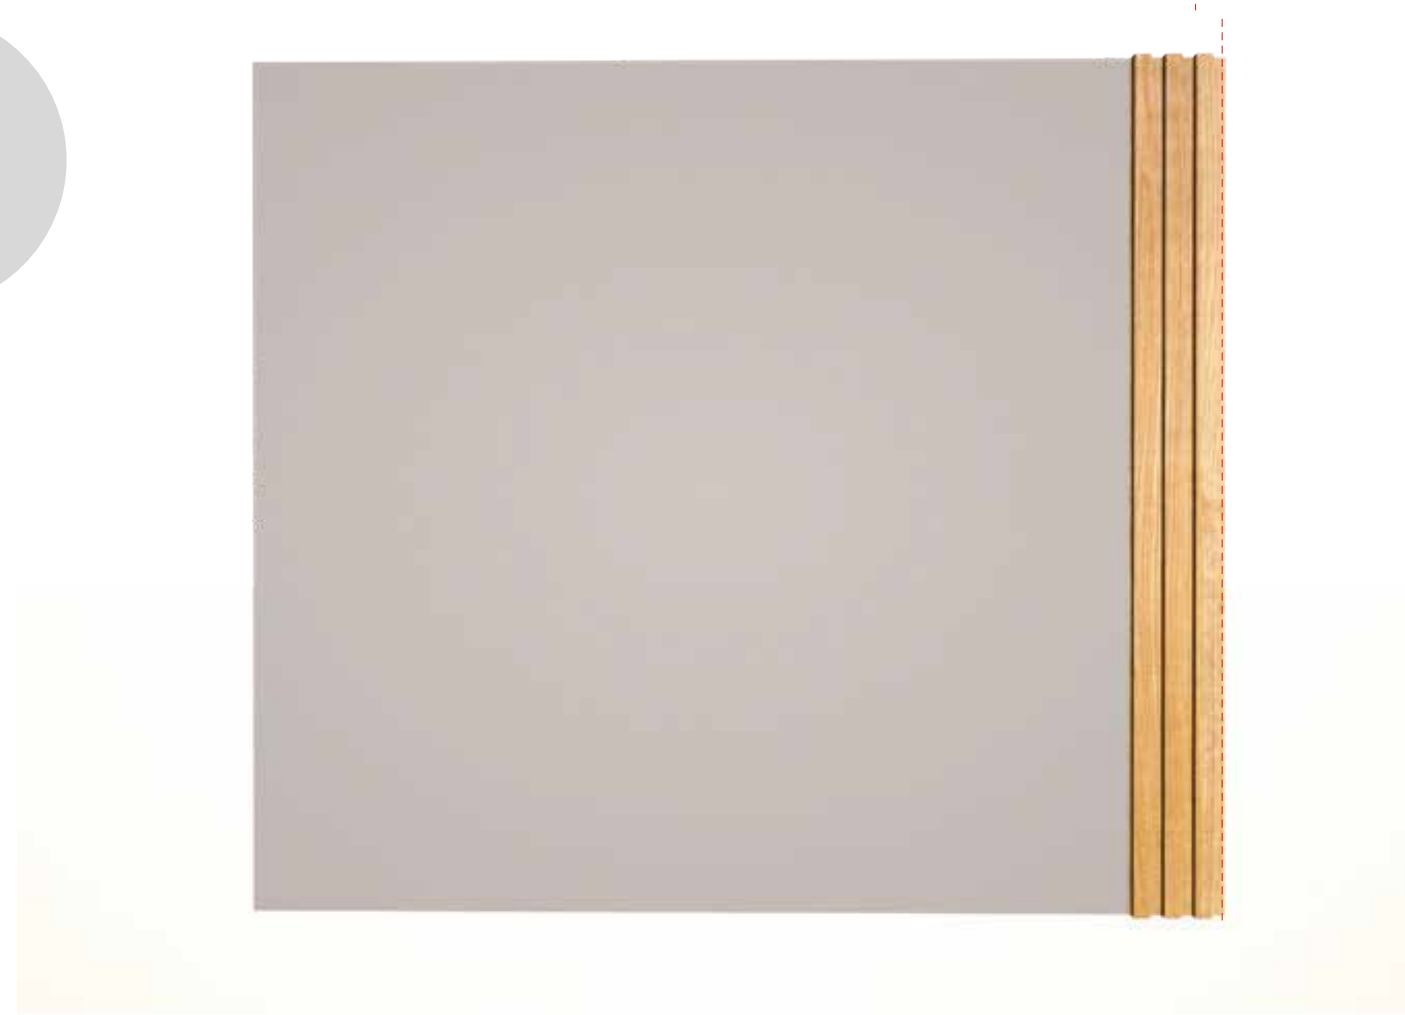


Place the first wall panel on the wall with the side of the tab skim with the edge of the wall.

2

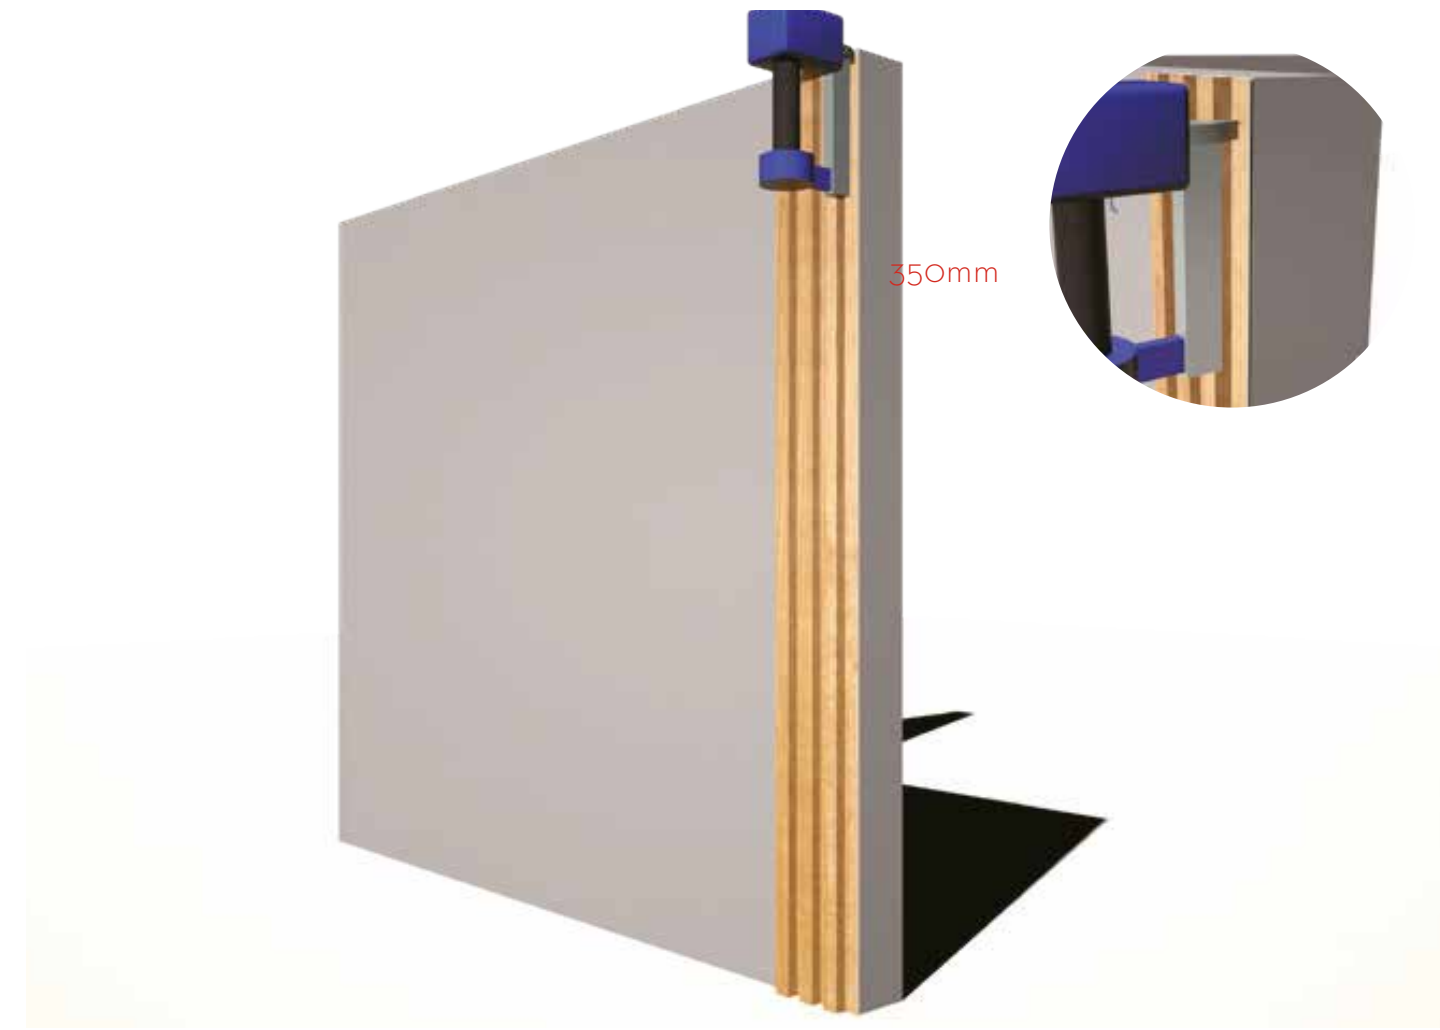


Use the drill to fix the panel to the wall with the tab seated screws.

3

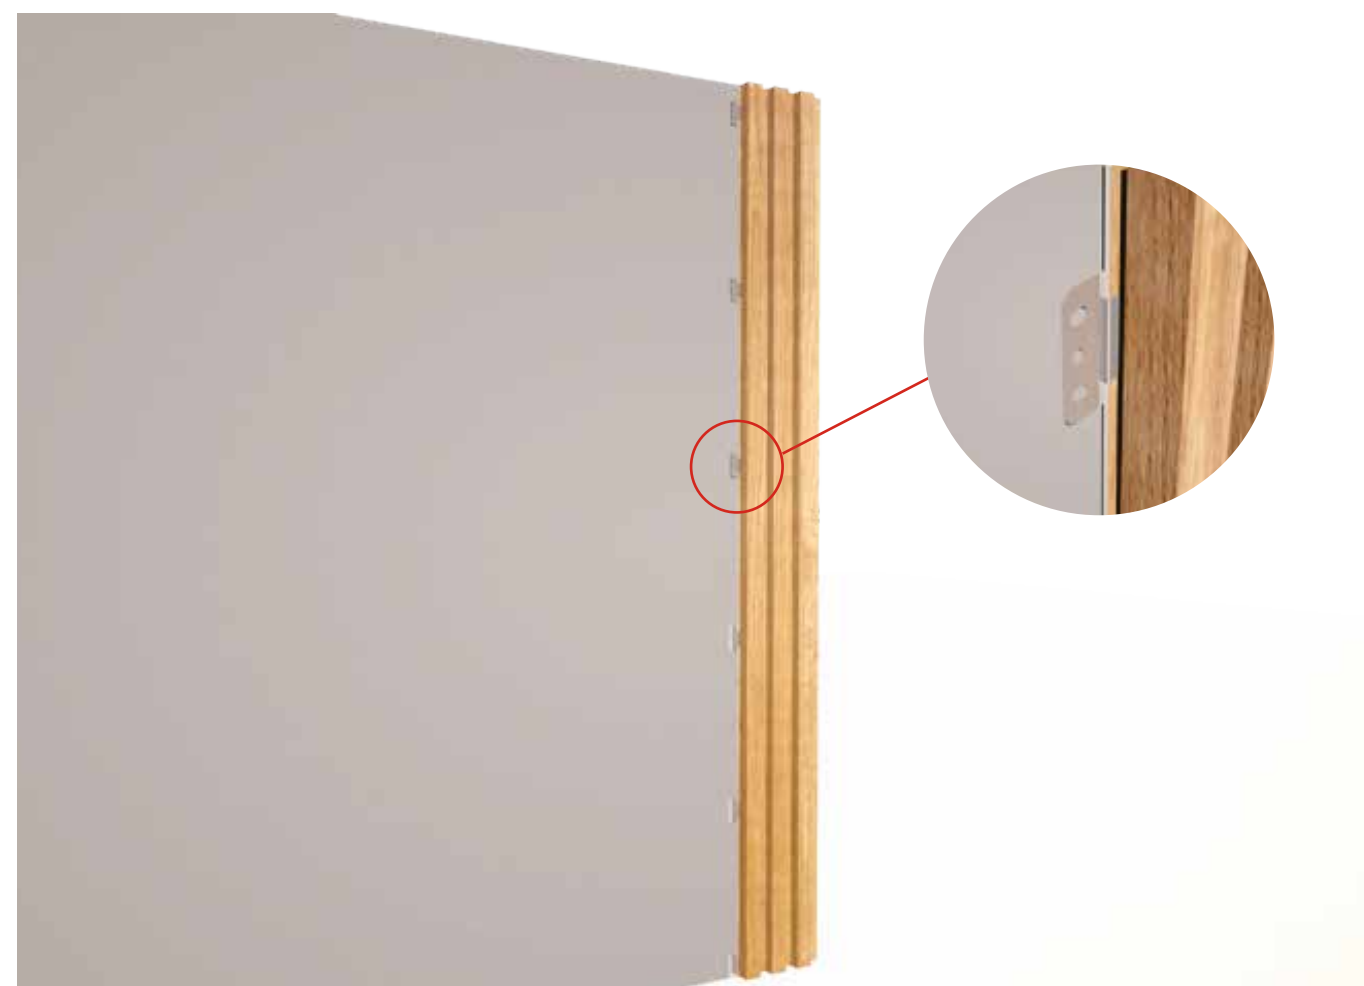


On the other side, attach the anchors to the panel, then attach to the wall with the drill.

4

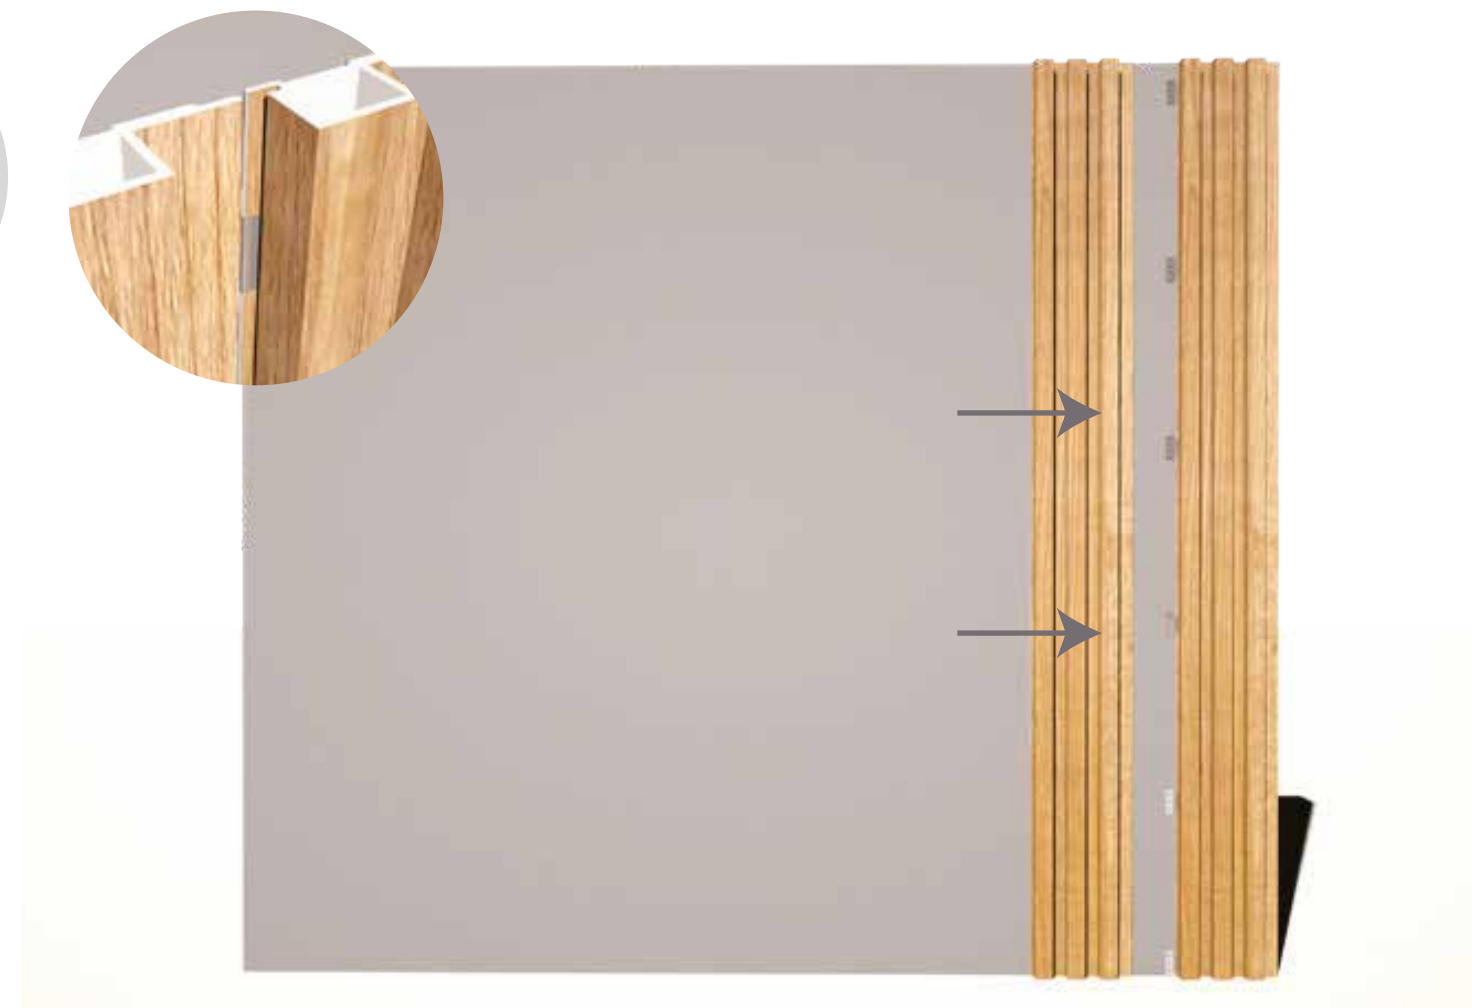

Snap the second panel into place, the tab on the second panel must fit into the slot of the first one. Finish the rest in the same way.

5

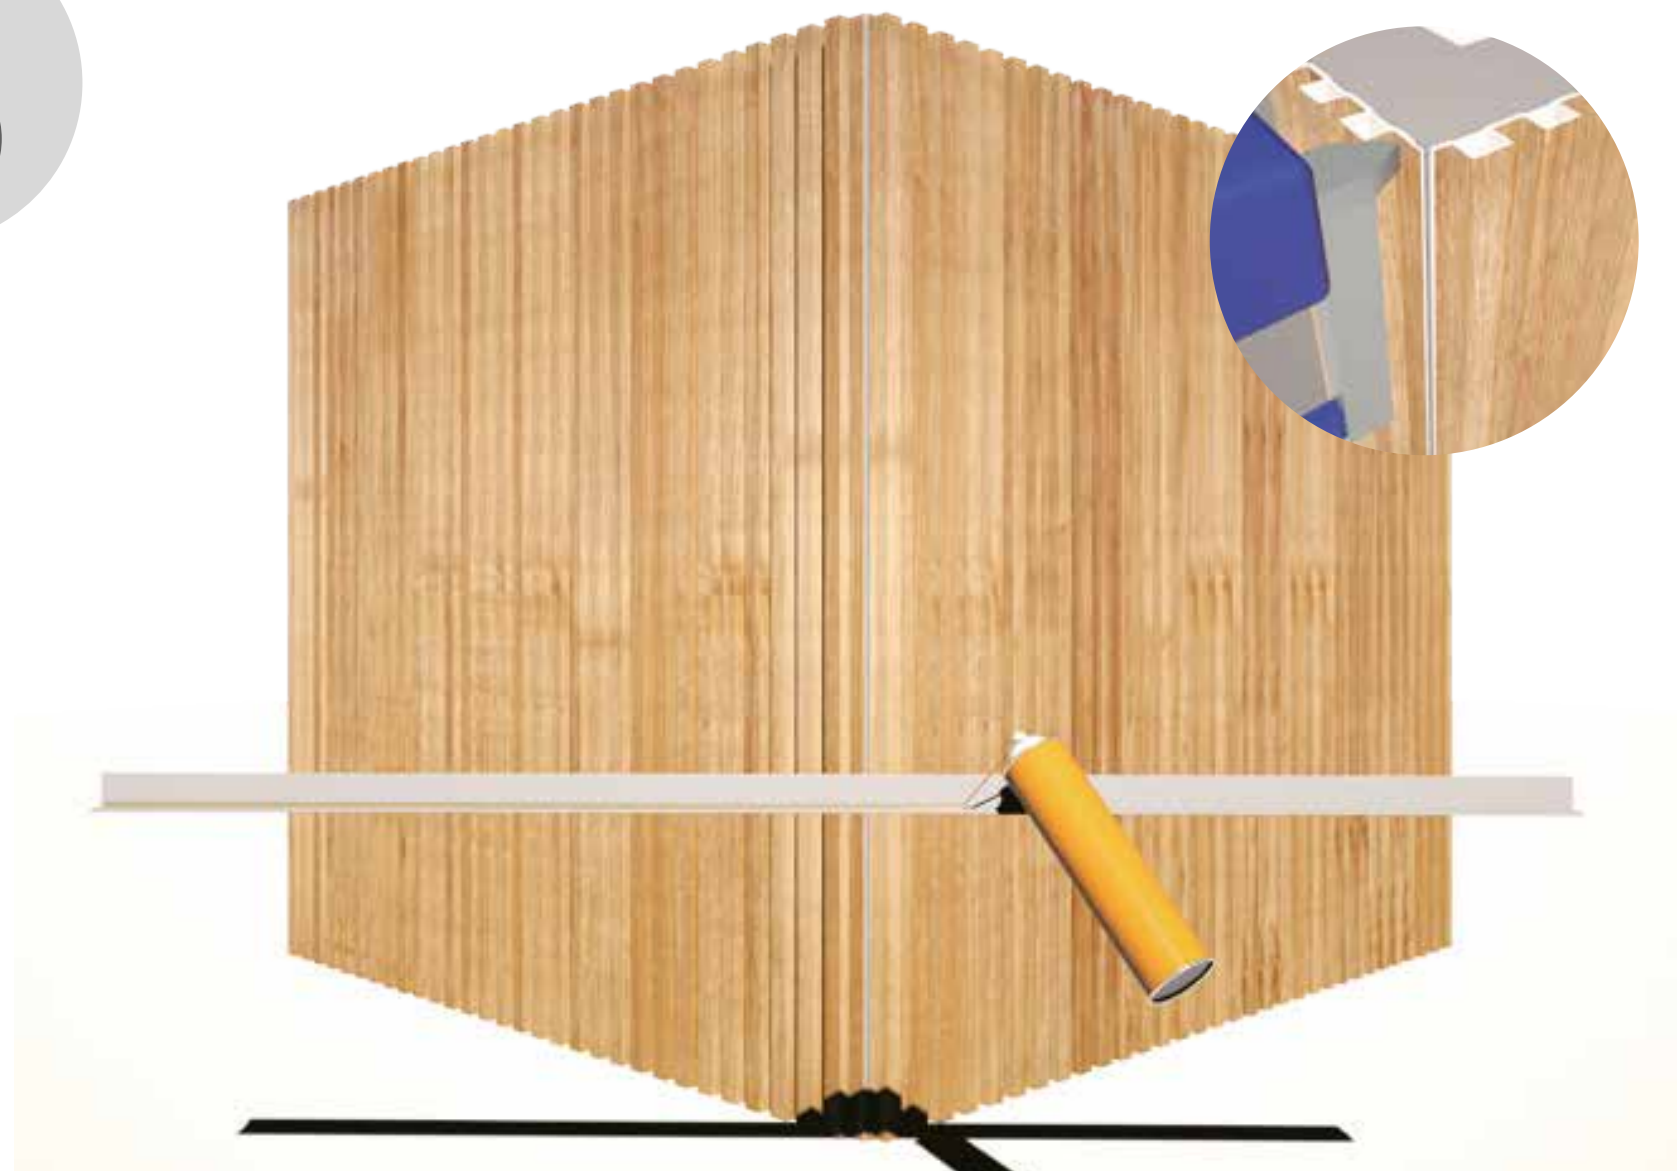

Use the glue to install the corner.

6



Installation complete!